





America's Oldest Stove Company
(Est. 1838)

JOB _____ ITEM # _____

GRIDDLES

FHP SERIES

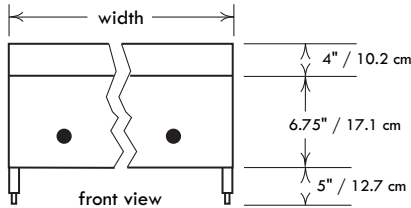

FHP36-36



FHP24-24



FHP48-48T



Standard Features & Benefits

CONSTRUCTION: Easy cleaning, corrosion resistant stainless steel finish, welded with angle iron and aluminized inner framing. Sturdy 4" heavy duty stainless pipe legs with adjustable feet. 4" wide stainless steel bull nose landing across the front is a functional work area for service plates and work utensils as well as control protection. Double wall construction with heavy insulation for cooler operation. Installation clearances for non-combustible surfaces are 0" on the sides and 0" in the rear, combustible surfaces are 4" on the sides and 5" in the rear.

GRIDDLE PLATE: Highly polished to minimize food sticking. 3/4" thick plate is standard, 1" thick is available. 4" high splash guard is standard. Higher sides are also available. 21 1/4" deep cooking surface with front, cold zone grease trough. Grease drain slot is 3.5" x 1" and feeds into a seamless, deep, removable grease drawer.

CONTROLS: Equipped with brass gas valves and automatic standing pilots. Pressure regulators are set at the factory for the gas specified. Optimal pressures are 4" WC for natural gas and 10" WC for propane. Manifold size is 3/4" NPT. All controls are tested and confirmed in good working order. Calibration and adjustments are the responsibility of the installer.

BURNERS: 12" incremental griddles feature 20,000 BTU cast iron "H" pattern burners, one for each 12" increment. 18" & 30" models feature 2 and 4 straight burners respectively, each rated at 18,000 BTU.

MATCH-UP: FHP Series griddles are designed to match up with FHP char-broilers and hot plates.

ACCESSORIES: Thermostats, 1" thick plates, chrome plating, safety pilot controls, gas hoses, grill scrapers, spatulas, cleaning supplies, carrying handles, knob protectors and matching equipment stands.

SPECIFICATIONS

Model Number	Width in./mm.	Sq. in. surface	Total BTU	Approx. lbs/kg
FHP12-12	12/305	255	20K	115/52
FHP18-18	18/457	383	36K	160/73
FHP18-18T	18/457	383	36K	165/75
FHP24-24	24/610	510	40K	205/93
FHP24-24T	24/610	510	40K	210/95
FHP30-30	30/762	638	72K	275/125
FHP30-30T	30/762	638	72K	280/127
FHP36-36	36/914	765	60K	285/130
FHP36-36T	36/914	765	60K	290/132
FHP48-48	48/1219	1020	80K	355/161
FHP48-48T	48/1219	1020	80K	365/166
FHP60-60	60/1524	1275	100K	465/211
FHP60-60T	60/1524	1275	100K	465/211
FHP72-72	72/1829	1530	120K	600/273
FHP72-72T	72/1829	1530	120K	600/273



Comstock-Castle Stove Co. • 119 W. Washington • Quincy, IL 62301 USA
Tel.: 217-223-5070 • Telefax: 217-223-0007 • www.castlestove.com

